

DUAL TRUCKS

Web Lock and Tightener Threading Directions

Follow Directions Closely Until Familiar with Threading

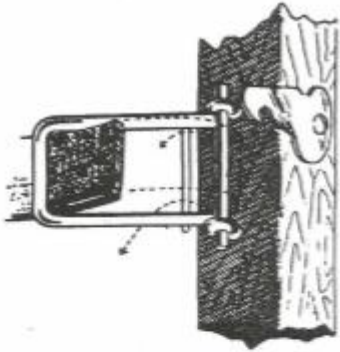


FIGURE 1

Hold locking device in **EXTREME OUTWARD** position

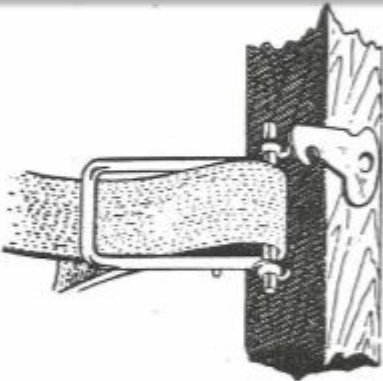


FIGURE 2

Strap is threaded through large opening around hinge post

Pull end through until is in approximate adjustment



FIGURE 3

Swing locking device to locking position

NOTE: End of strap is inside tightened strap if correctly threaded

CAUTION! DO NOT raise load until straps are tightened.
For longer life of trucks – keep nuts and bolts tightened.